

The most trusted name & market leader in transplanting innovation also offers...




# POTATO EQUIPMENT

## Semi-Automatic PLANTER

for POTATOES, TUBERS, GARLIC AND ONION

**Checchi & Magli**



available in 1, 2, or 4 row

## F300L

This semi-automatic planter is ground driven and has been designed for seeding potatoes and other tubers or bulbs, whole or cut. High planting output per hour, labor saving and exceptional working precision make this planter an excellent implement for mechanizing potato planting. Fully adjustable seeding depth, seeding frequency and distance between rows.



Three-point linkage for small or medium tractors.



granular pesticide distributor & granular fertilizer distributor



F300L/4 with row marker and seed hoppers

The F300L potato planter, available from one to four-rows, is equipped with a large carousel dispenser for high working speed and with two coulters per row which cover the planted tubers. The drive wheel, with its individual sprocket kit, allows for easy and precise adjustment for seed depth, in row spacing and between row spacing. Adjustable in-line seeding rate from 5.5"-11". Two 16" covering discs adjustable for width, depth and pitch.


*(Optional sprocket kits available for in-row spacing from 3"-15")*



Simple, efficient operation

**PLANT-TO-PLANT SPACING**  
standard 5.5"-11"  
optional 12.5"-15"  
optional 3"-5"

**ROW-TO-ROW SPACING**  
adjustable from  
21" to 35"

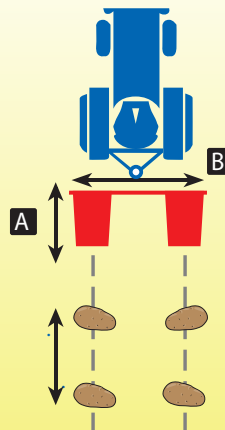

		1	2	3	4
<b>F300L</b>					
<b>A</b>	in.	53	53	53	53
<b>B</b>	in.	39.5	59	79	118
Ht.	in.	45.5	45.5	87	115
Wt.	lbs.	242	363	484	638
•←→•	in.	5.5-11	5.5-11	5.5-11	5.5-11
<b>HP</b>	HP	20	25	30	40

Many patented features set **&M** above the competition!



Can also be used for garlic, onions, tubers and bulbs in general.

### SP50 -- Rear Discharge POTATO DIGGER



#### SP50V...Rear Discharge DELICATE Potato Digger

The compact size of this machine, makes it ideal for digging potatoes and other tubers on small acreage. It is especially efficient on sandy soils. The Sp50 features 16" cutting discs, a fixed penetrating moldboard, rear steel wheels and an adjustable vibrating sieve. This allows the SP50 to slice through most soil conditions with ease. The vibrating sieve allows the crop to gently discharge to the rear of the digger. It is well suited for digging young & more tender crops. This system is especially recommended for digging up young potatoes gently, avoiding damage.



#### SP50V

<b>A</b>	in.	63
<b>B</b>	in.	29.5
<b>Ht.</b>	in.	33.5
<b>Wt.</b>	lbs.	353
<b>HP</b>	HP	20

### SP100 -- Side Discharge POTATO DIGGER



#### SP100...Side Discharge Potato Digger FOR ALL TYPES OF SOIL

Designed for digging potatoes or other tubers from any kind of soil, even on heavily sloped ground. The machine is equipped with two alternately-oscillating sieves, which shake the dirt off of the potatoes and deposit the clean potatoes on the ground (off the side) in a single row. This digger and front conveyor discs allow SP 100 to work even in difficult crop conditions.



#### SP100


<b>A</b>	in.	59
<b>B</b>	in.	59
<b>Ht.</b>	in.	45.5
<b>Wt.</b>	lbs.	595
<b>HP</b>	HP	25

3-point linkage differs depending on:  
 IF small tractor -- straddles single row (direct linkage)  
 IF medium tractor -- straddles 2 rows (offset linkage)

### INTRODUCING! ... the SP160 -- The NEW 2 Row POTATO DIGGER



- Distance between discs - 160 cm (63")
- Adjustable for row to row distances - 75-90 cm (30-35")
- Sifting belt pitch/height - 36 cm (14")
- Width of sifting conveyor belt - 165 cm (65")
- Coulter disc width - 60 cm (24")
- 9 variable pitch plough share blades
- Chain drive transmission
- Shaking kit standard
- Weight - 710 KG (1,562 lbs.)
- Slip clutch on drive line

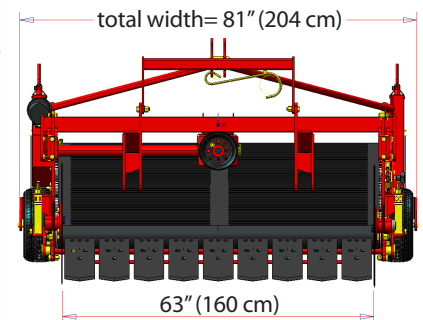

### VR76-- Cultivator/Hiller



The vibroridger VR76 has adjustable 20" covering discs and is suitable for cultivating the soil, ridging, furrowing as well as hoeing row crops such as potatoes, corn, tobacco, sunflower, celery, sugar beet and cotton. All parts are independent of each other, follow the ground contour and easily adjustable on the frame, thus enabling working in various row distances at the desired depth. Other configurations available. (Optional fertilizer & insecticide application.)



The VR76 EXPORT vibroridger uses a coulter disk of 20" in diameter which enables quality furrowing and high working speed & low cost.

	2	1+2.5	3	3+2.5	5
<b>VR 76</b>					
<b>A</b>	in.	60	60	60	60
<b>B</b>	in.	60	79	79	138
<b>Ht.</b>	in.	43	43	43	43
<b>Wt.</b>	lbs.	331	507	507	772
<b>HP</b>	HP	20	25	25	40



For more information visit:  
[www.checchiemagli.com](http://www.checchiemagli.com)  
[www.BestTransplanter.com](http://www.BestTransplanter.com)  
 OR search "C&M" or "Checchi & Magli" on YouTube

**Checchi & Magli**

Please contact your Authorized Dealer